
SPECIAL OFFER



UP TO AN ADDITIONAL 15% OFF PROMO PRICES PLUS 50% OFF THE ISO 17025 CALIBRATION

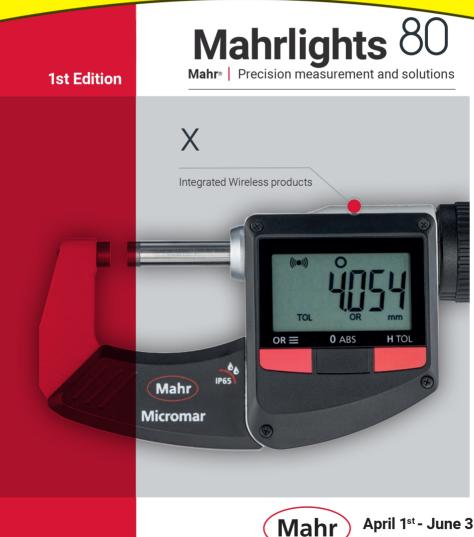

April 1st - June 30th 2021

Comprehensive product range with Integrated Wireless

Mahr offers a comprehensive range of measuring instruments with Integrated Wireless data transmission for use in all areas of industrial manufacturing and quality control. The Integrated Wireless range from Mahr delivers accurate measuring results with full mobility. Modern, simple measuring solutions – without the limitations of wired technology.

3 Product groups








Integrated Wireless – top level wireless connection

Best performance in every step

The key to successful production is intelligent, efficient quality control. This comes down to both the simple and precise recording of measuring values and structured data processing. Mahr's portfolio of wireless devices allows for faster and more specific measurements and offers full transparency. You can increase your mobility without having to compromise on the traceability of measuring steps along the entire value chain.

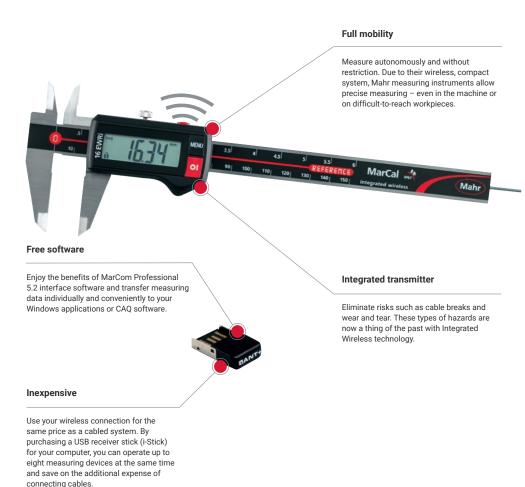

MarCal | Digital calipers

Integrated Wireless - conveniently transmit data



| Order No. | Product | Measuring Range | Resolution | Depth Rod | Details | List Price | Promo Price |
|-----------|------------|-------------------------|-----------------------|--------------|---|---------------------|---------------------|
| 4103401 | 16 EWRi | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Round | IP67, with Integrated Wireless thumbwheel | ^{\$} 259 | ^{\$} 210 |
| 4103403 | 16 EWRi | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Square | IP67, with Integrated Wireless thumbwheel | ^{\$} 259 | ^{\$} 210 |
| 9105795 | 16 EWRi | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Round | Starter pack including i-Stick | \$358 | ^{\$} 270 |
| 9105796 | 16 EWRi | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Square | Starter pack including i-Stick | ^{\$} 358 | ^{\$} 270 |
| 4112571 | 18 EWRi | 0 - 300 mm / 0 - 12 in | 0.01 mm / 0.0005 in | | IP65, with Integrated Wireless | ^{\$} 845 | ^{\$} 760 |
| 4112572 | 18 EWRi | 0 - 500 mm / 0 - 20 in | 0.01 mm / 0.0005 in | | IP65, with Integrated Wireless | \$1,090 | \$980 |
| 4112573 | 18 EWRi | 0 - 750 mm / 0 - 30 in | 0.01 mm / 0.0005 in | | IP65, with Integrated Wireless | ^{\$} 1,460 | ^{\$} 1,310 |
| 4112574 | 18 EWRi | 0 - 1000 mm / 0 - 40 in | 0.01 mm / 0.0005 in | | IP65, with Integrated Wireless | \$1,770 | ^{\$} 1,590 |
| 4126755 | 30 EWRi | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | | IP67, with Integrated Wireless | ^{\$} 473 | ^{\$} 385 |
| 4126754 | 30 EWRi | 0 - 200 mm / 0 - 8 in | 0.01 mm / 0.0005 in | | IP67, with Integrated Wireless | \$525 | ^{\$} 425 |
| 4126756 | 30 EWRi | 0 - 300 mm / 0 - 12 in | 0.01 mm / 0.0005 in | | IP67, with Integrated Wireless | ^{\$} 625 | ^{\$} 505 |
| 4126751 | 30 EWRi | 0 - 25 mm / 0 - 1 in | 0.01 mm / 0.0005 in | | IP67, with Integrated Wireless | \$362 | ^{\$} 292 |
| | | | | | | | |
| Accessor | ies for Me | asuring Instruments wit | h Integrated Wireless | | | | |

4102220 i-Stick

Wireless receiver for measuring instruments with Integrated Wireless

\$99 **\$79**

MarCal | Digital calipers

Digital with reference system – a reliable choice





| Order No. | Product | Measuring Range | Resolution | Depth Rod | Details | List Price | Promo Price |
|-----------|---------|------------------------|---------------------|-----------|-----------------------|-------------------|-------------------|
| 4103011 | 16 ER | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Round | with thumbwheel | ^{\$} 137 | ^{\$} 111 |
| 4103013 | 16 ER | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Square | with thumbwheel | ^{\$} 137 | ^{\$} 111 |
| 4103205 | 16 ER | 0 - 200 mm / 0 - 8 in | 0.01 mm / 0.0005 in | Square | | \$220 | ^{\$} 178 |
| 4103207 | 16 ER | 0 - 300 mm / 0 - 12 in | 0.01 mm / 0.0005 in | | | \$329 | ^{\$} 265 |
| 4103301 | 16 EWR | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Round | IP67, with thumbwheel | ^{\$} 203 | ^{\$} 165 |
| 4103303 | 16 EWR | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | Square | IP67, with thumbwheel | ^{\$} 203 | ^{\$} 165 |
| 4103304 | 16 EWR | 0 - 200 mm / 0 - 8 in | 0.01 mm / 0.0005 in | Square | IP67 | ^{\$} 279 | ^{\$} 225 |
| 4103306 | 16 EWR | 0 - 300 mm / 0 - 12 in | 0.01 mm / 0.0005 in | | IP67 | ^{\$} 394 | ^{\$} 315 |

MarCal | Digital calipers

The depth gage for every application



| Order No. | Product | Measuring Range | Resolution | Details | List Price | Promo Price |
|-----------|---------|------------------------|---------------------|------------------------|-------------------|-------------------|
| 4126700 | 30 EWR | 0 - 150 mm / 0 - 6 in | 0.01 mm / 0.0005 in | IP67, with data output | ^{\$} 495 | ^{\$} 400 |
| 4126699 | 30 EWR | 0 - 200 mm / 0 - 8 in | 0.01 mm / 0.0005 in | IP67, with data output | ^{\$} 546 | ^{\$} 442 |
| 4126701 | 30 EWR | 0 - 300 mm / 0 - 12 in | 0.01 mm / 0.0005 in | IP67, with data output | ^{\$} 571 | ^{\$} 460 |

MarCal | Digital universal calipers

Reliable and robust



| Order No. | Product | Measuring Range | Resolution | Depth Rod | Wireless | List Price | Promo Price |
|-----------|-----------|-----------------------|---------------------|-------------|----------|-------------------|-------------------|
| 4118807 | 30 EWR-V | 0 - 200 mm / 0 - 8 in | 0.01 mm / 0.0005 in | Rectangular | | ^{\$} 657 | ^{\$} 575 |
| 4118907 | 30 EWRi-V | 0 - 200 mm / 0 - 8 in | 0.01 mm / 0.0005 in | Rectangular | Х | ^{\$} 741 | ^{\$} 599 |

Micromar | Digital micrometers

The choice is yours: data output or Integrated Wireless



4157100

Micomar | Digital micrometers

Outside micrometer sets, perfectly tailored to your needs









4157150

| Order No. | Product | Measuring Range | Resolution | Details | List Price | Promo Price |
|-----------|-----------|--------------------------|----------------------|--|---------------------|---------------------|
| 4157010 | 40 ER | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | | ^{\$} 219 | ^{\$} 188 |
| 4157011 | 40 EWR | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | IP65 | ^{\$} 285 | ^{\$} 244 |
| 4157012 | 40 EWR | 25 - 50 mm / 1 in - 2 in | 0.001 mm / 0.0005 in | IP65 | ^{\$} 394 | ^{\$} 335 |
| 4157100 | 40 EWRi | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | IP65, Integrated Wireless | \$383 | ^{\$} 328 |
| 4157101 | 40 EWRi | 25 - 50 mm / 1 in - 2 in | 0.001 mm / 0.0005 in | IP65, Integrated Wireless | ^{\$} 459 | ^{\$} 394 |
| 4157115 | 40 EWRi | 0 - 100 mm / 0 - 4 in | 0.001 mm / 0.0005 in | IP65, Integrated Wireless, 4 micrometer screws in set | \$2,080 | ^{\$} 1,683 |
| 4157120 | 40 EWRi-L | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | IP65, Integrated Wireless, quick adjustment | ^{\$} 473 | ^{\$} 404 |
| 4157121 | 40 EWRi-L | 25 - 50 mm / 1 in - 2 in | 0.001 mm / 0.0005 in | IP65, Integrated Wireless, quick adjustment | ^{\$} 541 | ^{\$} 460 |
| 4157020 | 40 EWR-L | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | IP65, data output, quick adjustment | ^{\$} 441 | \$375 |
| 4157021 | 40 EWR-L | 25 - 50 mm / 1 in - 2 in | 0.001 mm / 0.0005 in | IP65, data output, quick adjustment | ^{\$} 499 | ^{\$} 427 |
| 4157050 | 40 EWR-V | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | IP65, data output, quick adjustment | ^{\$} 1,590 | \$1,285 |
| 4157150 | 40 EWR-V | 0 - 25 mm / 0 - 1 in | 0.001 mm / 0.0005 in | IP65, Integrated Wireless, quick adjustment | \$1,700 | ^{\$} 1,400 |

| Accessories | Accessories for Measuring Instruments with Integrated Wireless | | | | | | | |
|-------------|--|--|-------------------|-------------------|--|--|--|--|
| 4102603 | DK-U1 | Bidirectional USB data cable with power supply, for micrometers only | ^{\$} 225 | ^{\$} 160 | | | | |
| 4102606 | DK-D1 | Digimatic data cable | ^{\$} 195 | ^{\$} 144 | | | | |
| 4102220 | i-Stick | Wireless receiver for measuring instruments with Integrated Wireless | \$99 | ^{\$} 79 | | | | |

Micromar 844 A | Self-centering measuring pistol

Offers long measuring range with fixed anvils



Self centering bore gage kit



| Order No. | Product | Measuring Range | Number of Measuring Heads | Ring Gages | List Price | Promo Price |
|-----------|---------|--------------------------------------|------------------------------|--------------|---------------------|---------------------|
| 4487760 | 1086 R | 6 mm - 12 mm / 0.25 in - 0.4725 in | 3 | 8 mm,10 mm | ^{\$} 2,870 | ^{\$} 2,321 |
| 4487761 | 1086 R | 12 mm - 20 mm / 0.4725 in - 0.775 in | 2 | 16 mm | ^{\$} 2,710 | ^{\$} 2,193 |
| 4487762 | 1086 R | 20 mm - 50 mm / 0.775 in - 2.0 in | 4 | 25 mm, 40 mm | ^{\$} 3,630 | ^{\$} 2,933 |
| 4487763 | 1086 R | 50 mm - 100 mm / 2 in - 4 in | 4 | 60 mm, 85 mm | ^{\$} 4,690 | ^{\$} 3,791 |

Note: With the extension 44 Av. Includes 1086 indicator.

ANSI/AGD Group 2 | Precision dial indicators

The standard of the industry for nearly 100 years



MarStand 820 NG / 820 FG | Indicator stand with granite base

Can reach any position within its operating range

Mahr

| Order No. | Model | Working Range | Fine Adjustment | Mounting Hole | List Price | Promo Price |
|-----------|--------|-------------------------|--------------------|------------------|-------------------|-------------------|
| 4430100 | 820 NG | 0 - 130 mm / 0 - 5.1 in | | 8H7 | ^{\$} 541 | ^{\$} 438 |
| 4430110 | 820 NG | 0 - 130 mm / 0 - 5.1 in | | 3/8 in | ^{\$} 541 | ^{\$} 438 |
| 4431100 | 820 FG | 0 - 130 mm / 0 - 5.1 in | * | 8H7 | ^{\$} 885 | ^{\$} 716 |
| 4431110 | 820 FG | 0 - 130 mm / 0 - 5.1 in | * | 3/8 in | ^{\$} 885 | ^{\$} 716 |

Note: Indicator sold separately

^{\$}438

4430100

\$229

\$166

\$180

^{\$}180

MarTest* 801 SL / SGL / SGM | Test indicators for high accuracy measurement

Ensures maximum precision





| Order No. | Model | Measuring Range | Reading | Dial Diameter | Length of Styli | List Price | Promo Price |
|-----------|---------|--------------------|---------------------|---------------|--------------------|-------------------|-------------------|
| 4305960 | 801 S1 | ±0.015 in | 0.001 in | 1.1 in | 0.57 in | ^{\$} 130 | ^{\$} 105 |
| 4305950 | 801 S | ±0.015 in | 0.0005 in | 1.1 in | 0.57 in | ^{\$} 142 | ^{\$} 114 |
| 4307950 | 801 SG | ±0.015 in | 0.0005 in | 1.5 in | 0.57 in | ^{\$} 156 | ^{\$} 125 |
| 4307970 | 801 SGI | ±0.3 mm / 0.015 in | 0.01 mm / 0.0005 in | 1.5 in | 0.57 in | ^{\$} 136 | ^{\$} 109 |
| 4308970 | 801 SGM | ± 0.004 in | 0.0001 in | 1.5 in | 0.57 in | ^{\$} 177 | ^{\$} 142 |
| 4306950 | 801 SL | ± 0.010 in | 0.0005 in | 1.1 in | 1.62 in | ^{\$} 163 | ^{\$} 130 |
| 4306960 | 801 SGL | ± 0.010 in | 0.0005 in | 1.5 in | 1.62 in | ^{\$} 183 | ^{\$} 146 |
| 4302950 | 801 V | ±0.015 in | 0.0005 in | 1.1 in | 0.57 in | ^{\$} 163 | ^{\$} 130 |
| 4302960 | 801 VGM | ±0.004 in | 0.0001 in | 1.5 in | 0.57 in | ^{\$} 184 | ^{\$} 147 |

Millimess[®] Dial comparators

High precision and extreme robustness



| Order No. | Model | Measuring Range | Readings | Overtravel | Measuring Force | List Price | Promo Price |
|-----------|--------|--------------------|------------|------------|-----------------|-------------------|-------------------|
| 4335900 | 1002 Z | ± 0.0010 in | 0.00002 in | 0.11 in | 1 N | \$623 | ^{\$} 505 |
| 4335905* | 1002 Z | ± 0.0010 in | 0.00002 in | 0.11 in | 1 N | ^{\$} 685 | ^{\$} 555 |
| 4334900 | 1003 Z | ± 0.0020 in | 0.00005 in | 0.11 in | 1 N | \$284 | ^{\$} 230 |
| 4334905* | 1003 Z | ± 0.0020 in | 0.00005 in | 0.11 in | 1 N | ^{\$} 406 | \$329 |
| 4333900 | 1004 Z | ± 0.0050 in | 0.0001 in | 0.10 in | 1 N | ^{\$} 275 | ^{\$} 222 |
| 4333905* | 1004 Z | ± 0.0050 in | 0.0001 in | 0.10 in | 1 N | ^{\$} 406 | \$329 |
| 4332900 | 1010 Z | ± 0.0100 in | 0.0005 in | 0.10 in | 1 N | ^{\$} 265 | ^{\$} 215 |
| 4332905* | 1010 Z | ± 0.0100 in | 0.0005 in | 0.10 in | 1 N | \$307 | ^{\$} 249 |

Note: * Waterproof

Including plastic case; adapter 940 (for inch instruments only)

IP54, including plastic case, splash guard cover 957, rubber bellows (only for 1002/1003/1004); adapter 940 (for inch instruments only)

\$

MarStand 815 MG | Indicator stand with magnetic base

Can reach any position within its operating range

Fine List Magnetic Promo Order No. Adjustment **Total Height** Projection (Max.) Price Force Price Range 2 mm / 0.078 in ^{\$}335 ^{\$}284 4420385 224 mm / 8.818 in 130 mm / 5.118 in 300 N 4420386 2 mm / 0.078 in 316 mm / 12.440 in 200 mm / 7.784 in 800 N ^{\$}494 \$419 4420387 2 mm / 0.078 in 401 mm / 15.787 in 280 mm / 9.8425 in 800 N ^{\$}535 \$454 ^{\$556} 4420388 2 mm / 0.078 in 444 mm / 17.480 in 330 mm / 12.992 in 1000 N ^{\$}655

Note: Indicator sold separately

4420385

Practical functions, easy to operate





MarCator | Digitial indicators

Practical functions, easy to operate



| Order No. | Product | Measuring Range | Resolution | Details | List Price | Promo Price |
|-----------|-----------|------------------|-------------------------|---|-------------------|-------------------|
| 4336010 | 1075 R | 12.5 mm / 0.5 in | 0.01 mm / 0.0005 in | LOCK function | ^{\$} 209 | ^{\$} 160 |
| 4336020 | 1075 R | 12.5 mm / 0.5 in | 0.005 mm / 0.0001 in | LOCK function | ^{\$} 262 | ^{\$} 199 |
| 4336030 | 1075 R | 12.5 mm / 0.5 in | 0.001 mm / 0.00005 in | LOCK function | ^{\$} 362 | ^{\$} 275 |
| 4337620 | 1086 R | 12.5 mm / 0.5 in | 0.0005 mm / 0.000020 in | ABS, LOCK, Tol function | ^{\$} 447 | \$362 |
| 4337621 | 1086 R | 25 mm / 1 in | 0.0005 mm / 0.000020 in | ABS, LOCK, Tol function | ^{\$} 541 | ^{\$} 438 |
| 4337697 | 1086 R-HR | 12.5 mm / 0.5 in | 0.0001 mm / 0.000010 in | ABS, LOCK, TOL function, high resolution | ^{\$} 672 | ^{\$} 544 |
| 4337660 | 1087 R | 12.5 mm / 0.5 in | 0.0005 mm / 0.000020 in | ABS, LOCK, TOL function, Max/Min/ Max-Min | ^{\$} 552 | ^{\$} 447 |
| 4337661 | 1087 R | 25 mm / 1 in | 0.0005 mm / 0.000020 in | ABS, LOCK, TOL function, Max/Min/ Max-Min | ^{\$} 641 | ^{\$} 519 |
| 4337695 | 1087 R-HR | 12.5 mm / 0.5 in | 0.0001 mm / 0.000010 in | ABS, LOCK, TOL function, high resolution | ^{\$} 830 | ^{\$} 672 |
| 4337624 | 1086 Ri | 12.5 mm / 0.5 in | 0.0005 mm / 0.000020 in | ABS, LOCK, TOL function, Integrated Wireless | \$510 | ^{\$} 413 |
| 4337625 | 1086 Ri | 25 mm / 1 in | 0.0005 mm / 0.000020 in | ABS, LOCK, TOL function, Integrated Wireless | ^{\$} 604 | ^{\$} 510 |
| 4337663 | 1087 Ri | 12.5 mm / 0.5 in | 0.0005 mm / 0.000020 in | ABS, LOCK, TOL function, Max/Min/ Max-Min,Integrated Wireless | ^{\$} 615 | ^{\$} 497 |
| 4337665 | 1087 Ri | 25 mm / 1 in | 0.0005 mm / 0.000020 in | ABS, LOCK, TOL function, Max/Min/ Max-Min, Integrated Wireless | ^{\$} 683 | ^{\$} 553 |
| | | | | | | |

| Accessories | Accessories for Measuring Instruments with Integrated Wireless and Data Cable Connection | | | | | | | | |
|-------------|--|----------------------|-------------------|-------------------|--|--|--|--|--|
| 4102606 | DK-D1 | Digimatic data cable | ^{\$} 195 | ^{\$} 144 | | | | | |

Digimar[®] Height measuring instruments

Maximum flexibility and quality

Digimar 816 CL

Perfect for accurate measurements in production and the workshop



0

Digimar Height measuring instruments Robust and versatile, ideal for the workshop

Digimar 814 CR

Height measuring and scribing instrument





Clamping lever

for quickly securing the slide unit

Handwheel

for easy positioning and measuring

| Order No. | Product | Measuring Range | Resolution | Details | List Price | Promo Price |
|-----------|---------|-------------------------|--|---|----------------------|----------------------|
| 4429030 | 816 CL | 0 - 350 mm / 0 - 14 in | 0.01 mm, 0.001 mm / 0.0001 in, 0.00005 in | Error limit (2.8 + L/300) L in mm | ^{\$} 6,410 | ^{\$} 4,880 |
| 4429031 | 816 CL | 0 - 600 mm / 0 - 24 in | 0.01 mm, 0.001 mm / 0.0001 in, 0.00005 in | Error limit (2.8 + L/300) L in mm | ^{\$} 6,880 | ^{\$} 5,240 |
| 4429010 | 817 CLM | 0 - 350 mm / 0 - 14 in | 0.01 mm, 0.005 mm, 0.001 mm, 0.0005 mm, 0.0001 mm / 0.001 in, 0.0005 in, 0.0001 in, 0.0005 in, 0.00001 in | Error limit (1.8 + L/600) L in mm | ^{\$} 9,000 | ^{\$} 6,856 |
| 4429011 | 817 CLM | 0 - 600 mm / 0 - 24 in | 0.01 mm, 0.005 mm, 0.001 mm, 0.0005 mm, 0.0001 mm / 0.001 in, 0.0005 in, 0.0001 in, 0.0005 in, 0.00001 in | Error limit (1.8 + L/600) L in mm | ^{\$} 9,580 | ^{\$} 7,500 |
| 4429012 | 817 CLM | 0 - 1000 mm / 0 - 40 in | 0.01 mm, 0.005 mm, 0.001 mm, 0.0005 mm, 0.0001 mm / 0.001 in, 0.0005 in, 0.0001 in, 0.0005 in, 0.00001 in | Error limit (1.8 + L/600) L in mm | ^{\$} 17,070 | ^{\$} 13,000 |
| 4426100 | 814 SR | 0 - 350 mm / 0 - 14 in | 0.01 mm / 0.0005 in | Digit height 12 mm, handwheel for positioning and measuring | ^{\$} 762 | ^{\$} 590 |
| 4426101 | 814 SR | 0 - 600 mm / 0 - 24 in | 0.01 mm / 0.0005 in | Digit height 12 mm, handwheel for positioning and measuring | ^{\$} 1,160 | \$890 |

 $\textbf{Millimar}^{*} \mid \textbf{Evaluation instrument and measuring probe}$

Smart and versatile



| Order No. | Product | Numerical Display | Resolution | Details | List Price | Promo Price |
|----------------------|--------------------|----------------------|--------------------|--|---------------------------------|----------------------|
| 5312010 | Millimar C 1200 | ± 5000 μm | 0.1 µm | High resolution, high contrast TFT color display | ^{\$} 1,630 | ^{\$} 1,318 |
| | | | | | | |
| | | | | | | |
| Order No. | Product | Measuring Range | Measuring Force | Details | List Price | Promo Price |
| Order No. 5323010 | Product P2004 M | Measuring Range | | Details Measuring pin mounted in ball bearing guide | List Price ^{\$} 466 | Promo Price \$354 |

Millimar | Modules for your measuring tasks

Measuring modules and software to tackle customer-specific measuring tasks



| Order No. | Product | Details | List Price | Promo Price |
|-----------|------------------|--|---------------------|-------------------|
| 5312801 | C1700 PC | Dynamic function: MAX, MIN, MAX-MIN, MAX+MIN, 1 signal sharing computer with Cockpit | ^{\$} 3,510 | \$3,000 |
| 5312865 | Cockpit software | Dynamic function: MAX, MIN, MAX-MIN, MAX+MIN, Cockpit Software Marwin 13 | | ^{\$} 963 |
| 5312802 | History view | Allows for basic graphical review of data, range, average | \$308 | ^{\$} 264 |
| 5331120 | N1702 M | Induction probe module, 2 Mahr LVDT, range \pm 1 mm, \pm 2 mm, \pm 5 mm / \pm 0.040 in, \pm 0.080 in, \pm 0.2 in | \$520 | ^{\$} 446 |
| 5331130 | N1701 USB | USB connection module, 430 ma | ^{\$} 194 | ^{\$} 166 |
| 5331133 | N1701 PS | Power supply module, 2000 ma | ^{\$} 259 | ^{\$} 222 |
| 5331134 | N1704 I/O | Input/output module, 4 inputs / 4 outputs, 10 - 30 v, lamp/channel | \$362 | \$310 |
| 5331155 | N1700 PF | Module for Mahr Federal air tool 2500:1 / 5000:1 in, $\pm~76.5~\mu\text{m}/~\pm~0.0015~\mu\text{in}$ | \$830 | ^{\$} 711 |
| 2258471 | Airkit | Air filter regulator kit for up to 3 air modules | ^{\$} 345 | ^{\$} 296 |
| 4102058 | Foot switch | Foot switch to trigger data transmission | ^{\$} 135 | ^{\$} 113 |

Simple and intuitive to use for more measuring convenience

Mahr's entry-level surface metrology instrument is intuitive and simple to use. The 4.3" TFT touch display can be turned in any direction. The removable drive unit makes the MarSurf PS 10 flexible in production and manufacturing. It features an integrated but removable calibration standard. Measuring records can be saved in the instrument itself as PDF files. Alternatively, they can be transferred using MarCom Software.

Extremely easy to operate with detailed profile display

The large 4.3° high-resolution and backlit TFT touch display allows intuitive operation (just like a smartphone) and precise representation of the measuring profile.

Flexible use

The removable drive unit, in conjunction with the optional hand-held support, lends this instrument added versatility where space is limited, e.g. in holes or when measuring small parts.



Easily accessible evaluation and documentation

The PS 10 automatically creates a PDF measuring record without the need for any additional software. The measuring record can be easily transferred to a PC via the USB port. Alternatively, measuring data can be evaluated in the MarSurf XR 1 and XR 20 roughness software or the measurements can be sent to Excel or SPC programs using the MarCom Software.

Always at hand

The calibration standard stays in the instrument and can be checked at any time.



MarSurf | Mobile roughness measuring instruments

The best of the mobile devices



| Order No. | Product | Measuring Range | Probe | Details | List Price | Promo Price |
|-----------|------------------------------|---|--|--|---------------------|---------------------|
| 6910230 | PS 10 | 350 µm | Skidded probe system | Minimum 3900 profiles, min. 500,000 results, minimum 1500 PDF measuring records, expandable to 32 GB with microSD card | ^{\$} 2,750 | ^{\$} 2,350 |
| 6910260 | M 310 set | 350 µm | Skidded probe system 2 µm stylus tip | Memory for minimum 1500 PDF measuring records and 500,000 measuring results, expandable up to 32 GB using microSD card | \$4,680 | ^{\$} 4,450 |
| 6910267 | M 310 set with printer | 350 µm | Skidded probe system 2 µm stylus tip | Also with USB/Bluetooth printer and docking station to directly print profiles, MRC and ADC curves and measuring results | \$5,200 | ^{\$} 4,950 |
| 6910404 | M 400 | +/- 250 µm (up to +/-750 µm with 3x probe arm length) | Skidless probe system | Over 50 surface parameters for R-, P- and W-profiles according to current ISO/JIS or MOTIF standards (ISO 12085) | \$11,130 | \$8,900 |

Precimar | Length measuring bench

Robust construction makes it suitable for use in production





Sample application: Precimar SM 60 shown with MarCator 1086 R

| Order No. | Product | Measuring Range | Application Range | Details | List Price | Promo Price |
|-----------|---------|----------------------|-------------------------|--|---------------------|---------------------|
| 5357360 | SM 60 | 0 - 25 mm / 0 - 1 in | 0 - 60 mm / 0 - 2.36 in | Size of table ø 60 mm / 2.36 in, mass 9 kg | ^{\$} 2,980 | ^{\$} 2,385 |





MarCator 1086 Ri

Order number: 433761

MarCator 1087 Ri

Order number: 4337661



Additional accessories

An overview of the complete range of accessories can be found in the **Mahr Catalog**.

Order number: 4337698



Millimar C 1200

Order number: 4337661

Millimar P 2004 M

Order number: 5353010

| Order No. | Product | Measuring Range | Resolution | List Price | Promo Price |
|-----------|-----------------------|------------------------|---|---------------------|---------------------|
| 4337621 | MarCator 1086 R | 25 mm / 1 in | 0.0005 mm, 0.001 mm, 0.002 mm, 0.005 mm, 0.01 mm / 0.00002 in, 0.00005 in, 0.0001 in, 0.0002 in, 0.0005 in | ^{\$} 541 | ^{\$} 438 |
| 4337625 | MarCator 1086 Ri | 25 mm / 1 in | 0.0005 mm, 0.001 mm, 0.002 mm, 0.005 mm, 0.01 mm / 0.00002 in, 0.00005 in, 0.0001 in, 0.0002 in, 0.0005 in | ^{\$} 604 | ^{\$} 510 |
| 4337661 | MarCator 1087 R | 25 mm / 1 in | 0.0005 mm, 0.001 mm, 0.002 mm, 0.005 mm, 0.01 mm / 0.00002 in, 0.00005 in, 0.0001 in, 0.0002 in, 0.0005 in | ^{\$} 641 | ^{\$} 519 |
| 4337665 | MarCator 1087 Ri | 25 mm / 1 in | 0.0005 mm, 0.001 mm, 0.002 mm, 0.005 mm, 0.01 mm / 0.00002 in, 0.00005 in, 0.0001 in, 0.0002 in, 0.0005 in | ^{\$} 683 | ^{\$} 552 |
| 4337698 | MarCator 1086 R-HR | 25 mm / 1 in | 0.0001 mm, 0.0005 mm, 0.001 mm, 0.002 mm, 0.005 mm, 0.01 mm / 0.00001 in, 0.00002 in, 0.00005 in, 0.0001 in, 0.0002 in, 0.0005 in | ^{\$} 735 | ^{\$} 595 |
| 4337696 | MarCator 1087 R-HR | 25 mm / 1 in | 0.0001 mm, 0.0005 mm, 0.001 mm, 0.002 mm, 0.005 mm, 0.01 mm / 0.00001 in, 0.00002 in, 0.00005 in, 0.0001 in, 0.0002 in, 0.0005 in | ^{\$} 896 | ^{\$} 725 |
| 5312010 | Millimar C 1200 | ±5.0000 mm / ±0.194 in | 10 μm, 1 μm, 0.1 μm / 100 μin, 10 μin, 5 μin | ^{\$} 1,630 | ^{\$} 1,318 |
| 5323010 | Millimar P 2004 M | ± 2 mm / ± 0.080 in | | ^{\$} 446 | ^{\$} 354 |



Mahr Inc. 1144 Eddy Street Providence, RI 02905 1-800-343-2050 www.mahr.com



Copyright © 2021 Mahr Inc. All rights reserved. Due to technical improvements and/or further product developments, all of the specifications shown in this document are subject to change without notice. Other product and company names listed are trademarks or trade names of their respective companies.